

Live The Extraordinary Future

Human ambitions are limitless, day by day speeding up to a new progress. So, why put a brake when you are riding against every hurdle?

With that belief, Cyclux range is here to gear your ambitions and lead you to your desired destination as success is not a matter of a single pedal swing, you must keep pedaling up to attain it.



Alloy Frame 38.1 cm (15) with Internal Cable Routing

Lock Out Threadless Suspension 54-559 (26x2.10), D/Wall Alloy Rim Nylon Tyres



Bulged 31.75mm Short Bend With Alloy Stem





21 Speed, Shimano Gear System with Rapid Fire Shifters








54-559 (26x2.10), D/Wall Alloy Rim Nylon Tyres



Bulged 31.75mm Short Bend With Alloy Stem












Alloy Frame 45 cm (17.7) with Internal Cable Routing




54-559 (26 x 2.10), D/Wall Alloy Rim Nylon Tyres













Devon 26T

MODEL NO. 26 252 DN







62-559 (26 x 2.40), D/Wall Alloy Rim Nylon Tyres




Bulged 31.75mm Short Bend With Alloy Stem













Suspension Threadless 60-559 (26 x 2.35), D/Wall Alloy Rim with Nylon Tyres



Bulged 31.75mm Short Bend With Alloy Stem



Double Disc Brake



21 Speed Shimano Gear System with Rapid Fire Shifters





Alloy Frame 43 cm (17) With Internal Cable Routing

Suspension (Heavy Duty)

54-559 (26 x 2.10), D/Wall Alloy Rim with Nylon Tyres Bulged 31,75mm Short Bend With Alloy Stem

PU Cushion with QR

Do:

uble c Brake

21 Speed, Shimano Gear System with Rapid Fire Shifters



Alloy Frame 43 cm (17) with internal cable routing


Suspension (Heavy Duty)

54-559 (26 x 2.10), D/Wall Alloy Rim with Nylon Tyres

Bulged 31.75mm Short Bend With Alloy Stem

PU Cushion with QR

Double



Rally 26T


MODEL NO. 26T 248 RL



Alloy Frame 43 cm (17) With Internal Cable Routing

Suspension (Heavy Duty)

54-559 (26 x 2.10), D/Wall Alloy Rim with Nylon Tyres









21 Speed, Shimano Gear System with Rapid Fire Shifters

Chrome 27.5T

MODEL NO. 27.5T 020 CM **COLORS** Black / Fluoro Green Black / Fluoro Orange






55-584 (27.5x2.10), D/Wall Alloy Rim with Nylon Tyres



Bulged 31.75mm Short Bend With Alloy Stem



Double Disc Brake







Suspension Threadless

54-559 (29 X 2.10), D/Wall Alloy Rim with Nylon Tyres



PU Cushion with QR

Double





Alloy Frame 46 cm (18) With Internal Cable Routing

Suspension Threadless

54-622 (29x2.10), D/Wall Alloy Rim with Nylon Tyres



Bulged 31.75mm Short Bend With Alloy Stem

PU Cushion with QR

Double Disc Brake 21 Speed, Shimano Gear System with Rapid Fire Shifters







54-559 (26 x 2.10), D/Wall Alloy Rim with Nylon Tyres



Bulged 31.75mm Short Bend With Alloy Stem









Alloy Frame 47 cm (18.5) with Internal Cable Routing



37-622 (700x35C), D/Wall Alloy Rim with Nylon Tyres



Bulged 31.75mm Straight PU Cushion with QR



Double Disc Brake



21 Speed, Shimano gear System with Rapid Fire Shifters







60-559 (26 x 2.4), D. Wall Alloy Rim Nylon Tyres













Attain 26T

MODEL NO. 26 250 AN



Hi Tensile Steel Frame 43,2 cm (17) with Interna Cable Routing

Suspension 3 Threadless

62-559 (26 x 2.35), D/Wall Alloy Rim with Nylon Tyres



Bulged 31.75mm Short Bend With Alloy Stem







COLORS







55-559 (26x3.00), D/Wall Alloy Rim with Nylon Tyres



Bulged 31.75mm Short Bend With Stem



Double Disc Brake









52-559 (26x1.95), S/Wall Alloy Rim with Nylon Tyres








Front & Rear 'Vee'





Hi Tensile Steel Frame 36 Cm (14)




54 - 559 (26 x 2.10), D. Wall Alloy Rim Nylon Tyres



Bulged 31.75mm Short Bend With Alloy Stem



Double Disc Brake

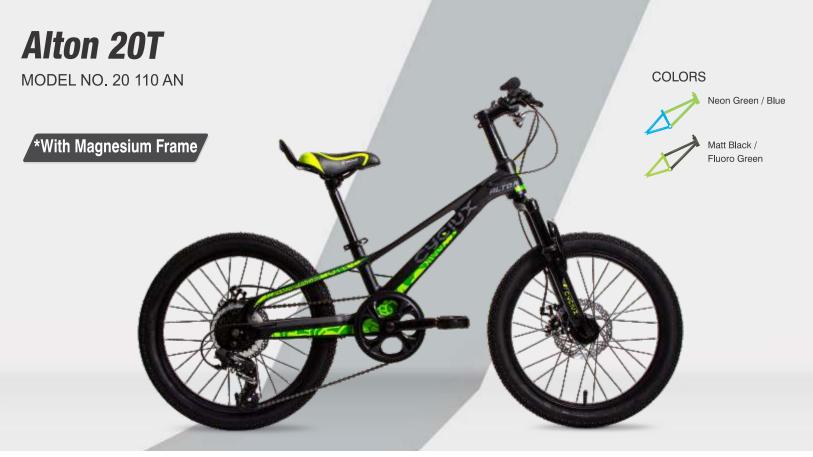





74-406 (20 x 2.125), Single Wall Alloy Rim (Look alike D/Wall) Nylon Tyres



Bulged 31,75mm Short Bend









Brazo 2.3







76-406 (20x3), Single Wall Alloy Rim (Lookalike D/Wall) Nylon Tyres

















60-406 (20 x 2.40), Steel Rim with Nylon Tyres







Fun Bike 16T

MODEL NO. 16 049 FK



COLORS



Matt Fluoro Orange / Sky Blue

Matt Neon Green / Sky Blue

Matt Black / Neon Green

Hi Tensile Steel Frame 27 cm (10.5)



57-305 (16x2.4) Steel Rim With Tyre/Tube



Short bend with attractive bar ends





Your Inside Leg (A)

51.0 - 58.5 cm 58.5 - 73.5 cm 61.0 - 76.0 cm 66.0 - 81.0 cm 73.5 - 89.0 cm 76.0 - 91.0 cm 79.0 - 94.0 cm 84.0 - 99.0 cm

The Frame Size Needed (B)



Measuring for your New Bike

Technical Abbreviations PU – Polyurethane QR – Quick Release

- 1. To ride bike comfortably, you should be able to keep your foot on the pedal through out its rotation, most handle bars & saddles are adjustable but it is still important to pick right frame size.
- 2. Check your inside leg length measurements against the chart to see which frame size is right for you.





Avon Cycles Limited, G.T.Road, Ludhiana - 141003 (India) | Ph.: 0161-4684800 (100 Lines) www.avoncycles.com | E-mail: avon@avoncycles.com | CIN: U35921PB1951PLC001699







